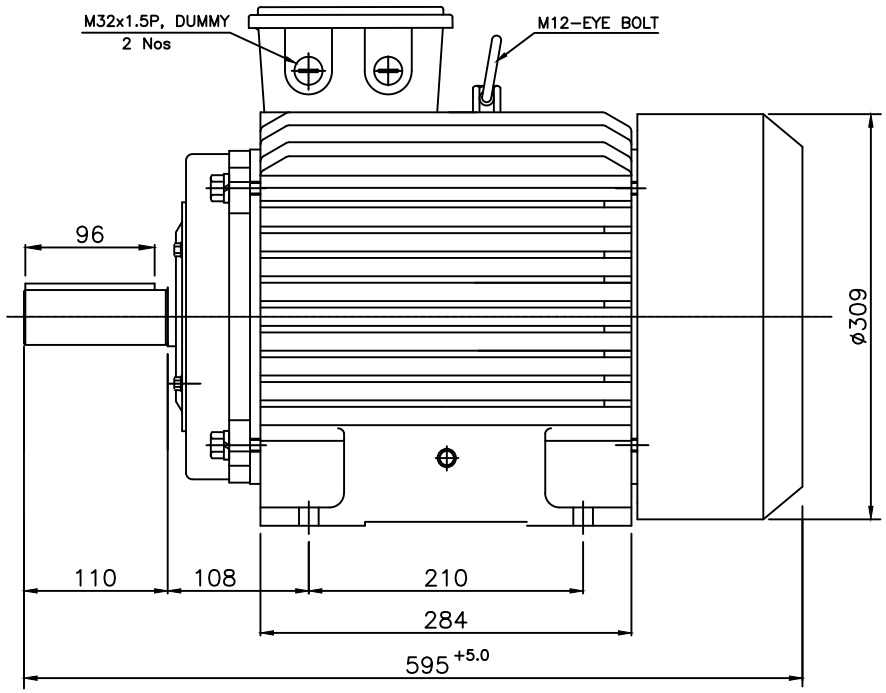

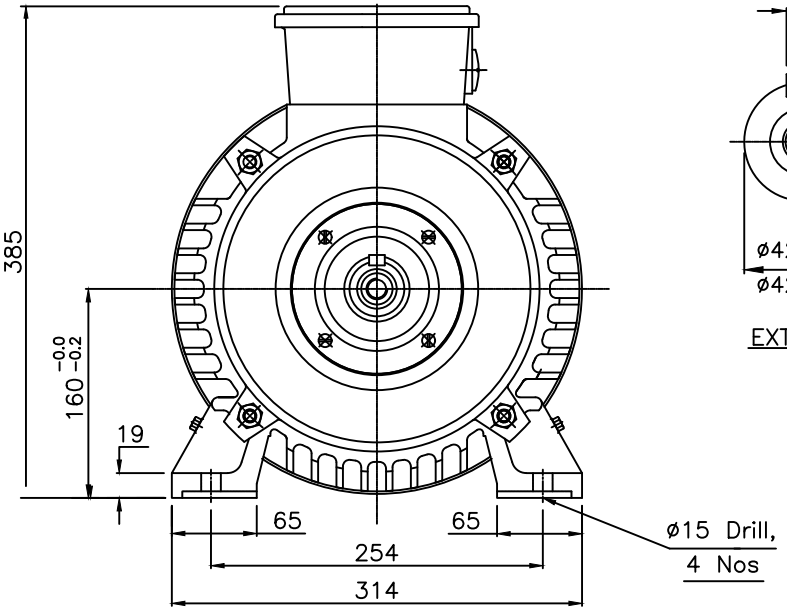

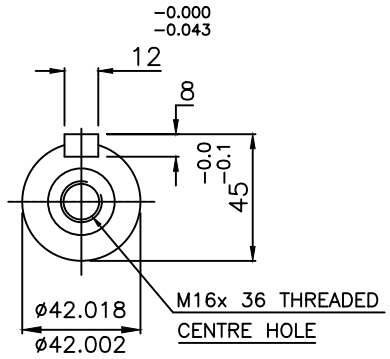

EXTENSION DETAILS

TERMINAL BOX DETAILS

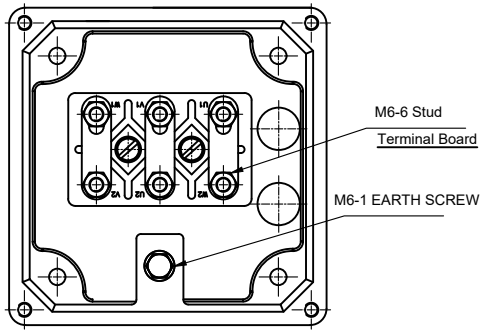

NAME PLATE DETAILS (IS 12615 : 2018)	
MARKING	CE
Frame	LE 160 M
Duty	S1
Class of insulation	F
Frequency, Hz	50 ±5%
Pole	2
Connectoin	Delta
Output in KW	11
Voltage in volts	415 ±10%
F.L.Current in Amps	19
Speed in RPM	2940
% Efficiency	89.4(IE2)
Protection	IP-55
Power Factor	0.88
BRG DE	6309 ZZC3
BRG NDE	6309 ZZC3

ALL DIMENSIONS ARE IN mm

LINEAR DIMENSIONS (MACHINING)	GENERAL TOLERANCES				
	ABOVE	0	30	100	300
	UPTO	30	100	300	1000
	TOL	±0.2	±0.3	±0.5	±0.8
ANGLES	± 1/2"				

DCR. NO	ZONE	ALTERATIONS	SIGN/ DATE

PREPARED	H.H	02–12–2023
CHECKED	V.B	02–12–2023
APPROVED	R.R	02–12–2023
SCALE	NTS	
QUANTITY	1 No	
MATERIAL		
WEIGHT IN kg.	ROUGH / FINISHED	RAW MATERIAL CODE

LAKSHMI ELECTRICAL DRIVES LIMITED
COIMBATORE - 641 004

GA DRAWING
11 kW, 2 POLE, IE2

MODEL	DRG.No.	REV. NO
LE 160 M	LE16023002	00