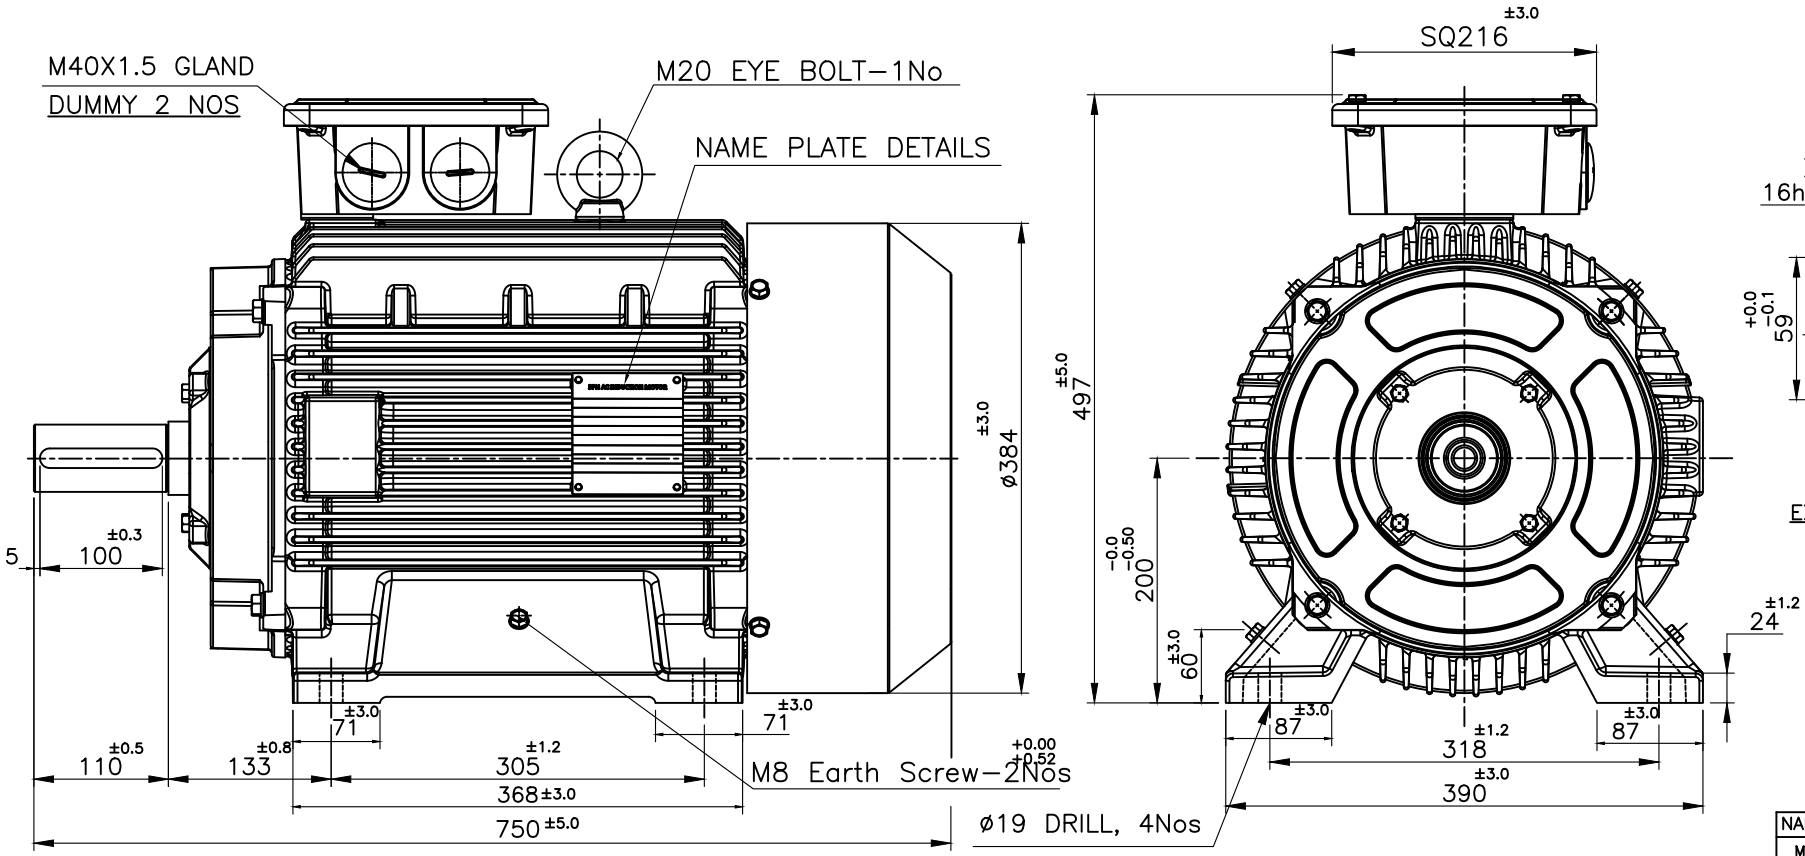

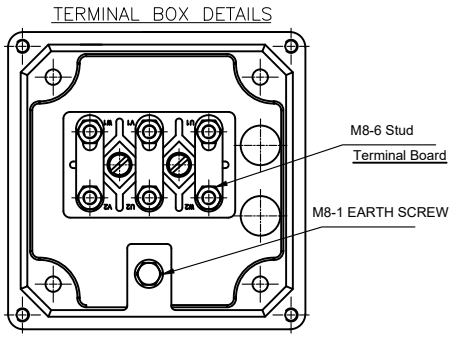

NAME PLATE DETAILS (IS12615:2018)	
Marking	CE
Frame	LE 200L
Duty	S1
Class of Insulation	F
Frequency, Hz	50±5%
Pole	4
Connection	DELTA
Output in KW	30
Voltage in Volts	415±10%
F.L.Current in Amps	53
Speed in RPM	1470
% Efficiency	92.3(IE2)
Brg.(DE)	6312 ZZC3
Brg.(NDE)	6312 ZZC3
Power Factor	0.89
Protection	IP55

ALL DIMENSIONS ARE IN mm					
LINEAR DIMENSIONS (MACHINING)	GENERAL TOLERANCES				
	ABOVE	0	30	100	300
	UPTO	30	100	300	1000
	TOL	±0.2	±0.3	±0.5	±0.8
ANGLES	± 1/2"				

DCR. NO	ZONE	ALTERATIONS	SIGN/ DATE

PREPARED	H.H		04–12–2023
CHECKED	V.B		04–12–2023
APPROVED	R.R		04–12–2023
SCALE	NTS		
QUANTITY	1 No		
MATERIAL			
WEIGHT IN kg.	ROUGH		
	FINISHED		

LAKSHMI ELECTRICAL DRIVES PRIVATE LIMITED
COIMBATORE – 641 004

G.A DRAWING
30KW ,4 POLE ,IE2

MODEL	LE 200L	DRG.No. LE20043001	REV. NO	00