


TERMINAL BOX DETAILS

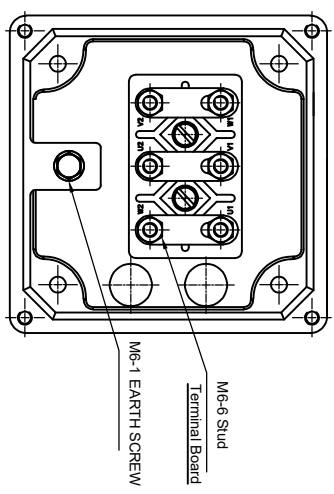

NAME PLATE DETAILS (IS 12615 : 2018)	CE
MARKING	LE 160 M
Frame	S1
Duty	F
Class of insulation	50 ±5%
Frequency, Hz	2
Pole	Delta
Connectoin	11
Output in KW	4.15 ±10%
Voltage in volts	21.5
F.L. Current in Amps	2930
Speed in RPM	91.2/(E3)
% Efficiency	IP-55
Protection	0.88
Power Factor	6309 ZZC3
BRG DE	6309 ZZC3
BRG NDE	

GA DRAWING	11 KW, 2 POLE, IE3
LE 160 M	DRG.No. LEH16023002
REV. NO	00

ALL DIMENSIONS ARE IN mm

GENERAL TOLERANCES

LINEAR DIMENSIONS (MACHINING)	ABOVE	0	30	100	300	1000
	UPTO	30	100	300	1000	
	TOL	±0.2	±0.3	±0.5	±0.8	

ANGLES ± 1/2°

LAKSHMI ELECTRICAL DRIVES LIMITED
COIMBATORE - 641 004

