


EXTENSION DETAILS

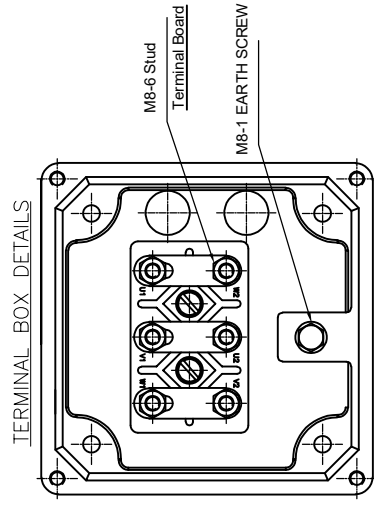

TERMINAL BOX DETAILS

NAME PLATE DETAILS (IS 12615 : 2016)	
MARKING	CE
Frame	LE 180L
Duty	S1
Class of insulation	F
Frequency, Hz	50 ±5%
Pole	4
Connection	Delta
Output in KW	22
Voltage in volts	415 ±10%
F.L. Current in Amps	43
Speed in RPM	1465
% Efficiency	93(IE3)
Protection	IP-55
Power Factor	0.85
BRG DE	6310 ZZC3
BRG NDE	6310 ZZC3

ALL DIMENSIONS ARE IN mm		K.SP		12-06-2024				
LINEAR DIMENSIONS (MACHINING)	GENERAL TOLERANCES	PREPARED	CHECKED	ASP	12-06-2024			
	ABOVE 0					APPROVED	K.K.N	12-06-2024
	UPTO 30							
TOL ±0.2	QUANTITY	1 No						
30			MATERIAL	WEIGHT IN kg.				
100					SIGN/DATE	ROUGH		
300	ALTERATIONS	FINISHED						
1000			DCR. ZONE NO					
±0.5				± 1/2'				
±0.8								
ANGLES								

LAKSHMI ELECTRICAL DRIVES PRIVATE LIMITED
 COIMBATORE - 641 004

G.A DRAWING
 22 kW, 4 POLE, IE3

MODEL LE 180L DRG.No. LE18045002 REV. NO 00